




Performance Curve - 2900rpm

APE, CVF 10

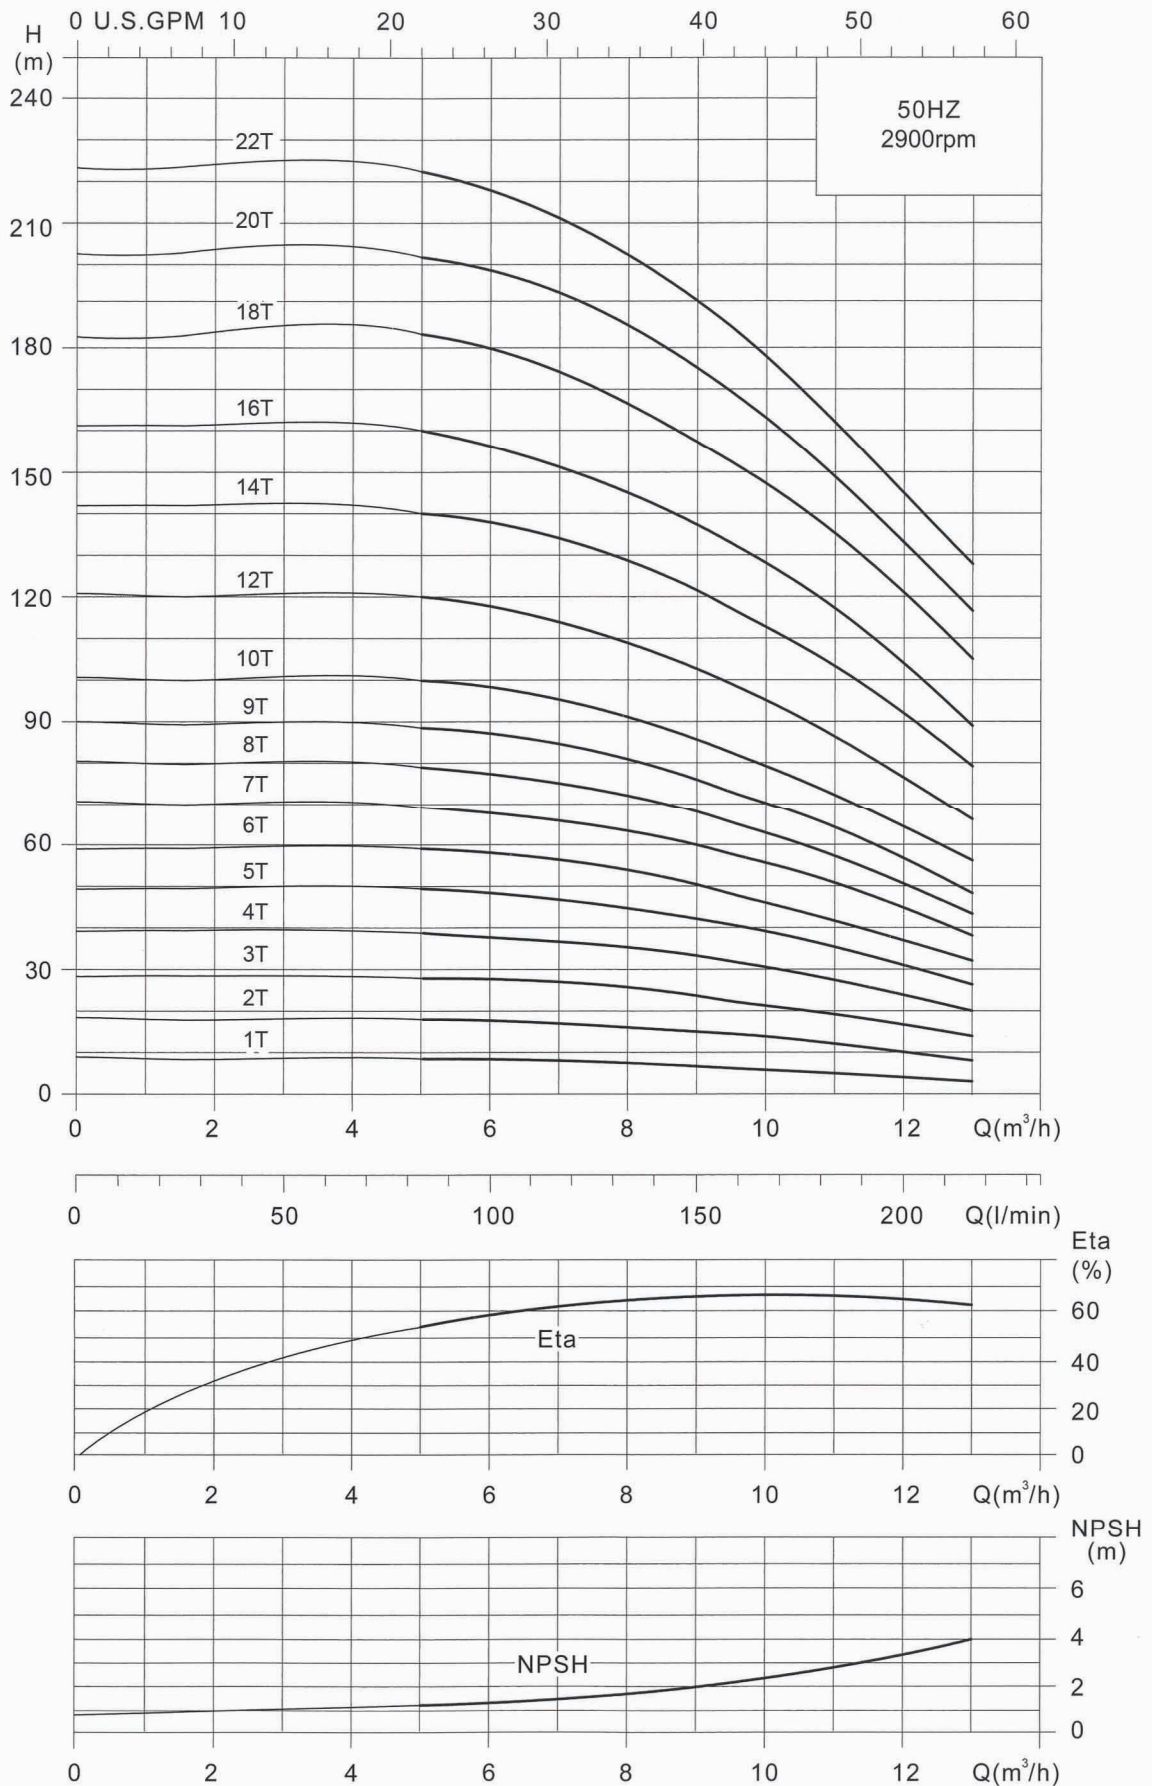

Dimensions and Weights - 2900rpm

APE, CVF 10

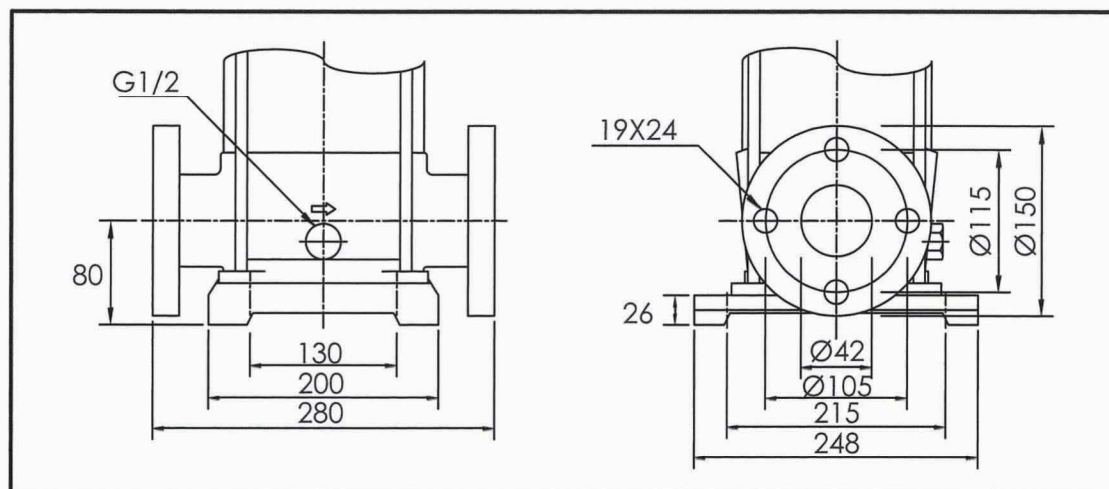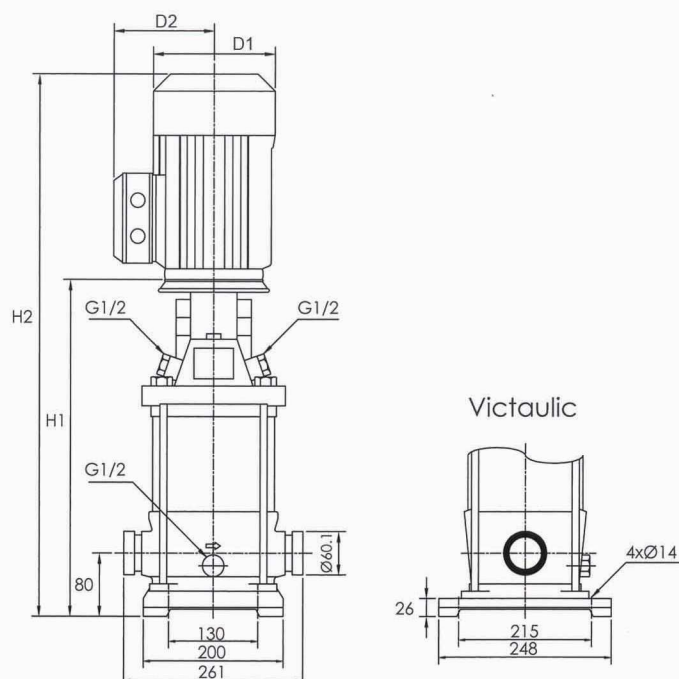

**Flange
(DIN-ANSI-JIS)
PN25/DN40**

Pump Type (2900rpm)	Motor	Dimensions [mm]						Net Weight [kg]	
	P2	Victaulic		DIN Flange		D1	D2	Victaulic	DIN Flange
	[kW]	H1	H2	H1	H2				
APE / CVF 10-1T	0.37	353	544	353	544	141	109	28.0	32.0
APE / CVF 10-2T	0.75	357	588	357	588	141	109	31.0	34.0
APE / CVF 10-3T	1.1	387	618	387	618	141	109	34.0	38.0
APE / CVF 10-4T	1.5	433	679	433	679	175	144	43.6	47.1
APE / CVF 10-5T	2.2	463	735	463	735	175	144	46.6	50.1
APE / CVF 10-6T	2.2	493	765	493	765	175	144	47.6	51.1
APE / CVF 10-7T	3.0	528	852	528	852	198	153	55.4	58.9
APE / CVF 10-8T	3.0	558	882	558	882	198	153	56.4	60.0
APE / CVF 10-9T	3.0	588	912	588	912	198	153	57.5	61.0
APE / CVF 10-10T	4.0	618	948	618	948	221	174	65.5	69.0
APE / CVF 10-12T	4.0	678	1008	678	1008	221	174	67.5	71.0
APE / CVF 10-14T	5.5	770	1165	770	1165	275	195	92.9	96.4
APE / CVF 10-16T	5.5	830	1225	830	1225	275	195	94.9	98.5
APE / CVF 10-18T	7.5	890	1325	890	1325	275	195	105.0	108.5
APE / CVF 10-20T	7.5	950	1385	950	1385	275	195	107.0	110.5
APE / CVF 10-22T	7.5	1010	1445	1010	1445	275	195	109.1	112.6