




Performance Curve - 2900rpm

APE, CVF 15

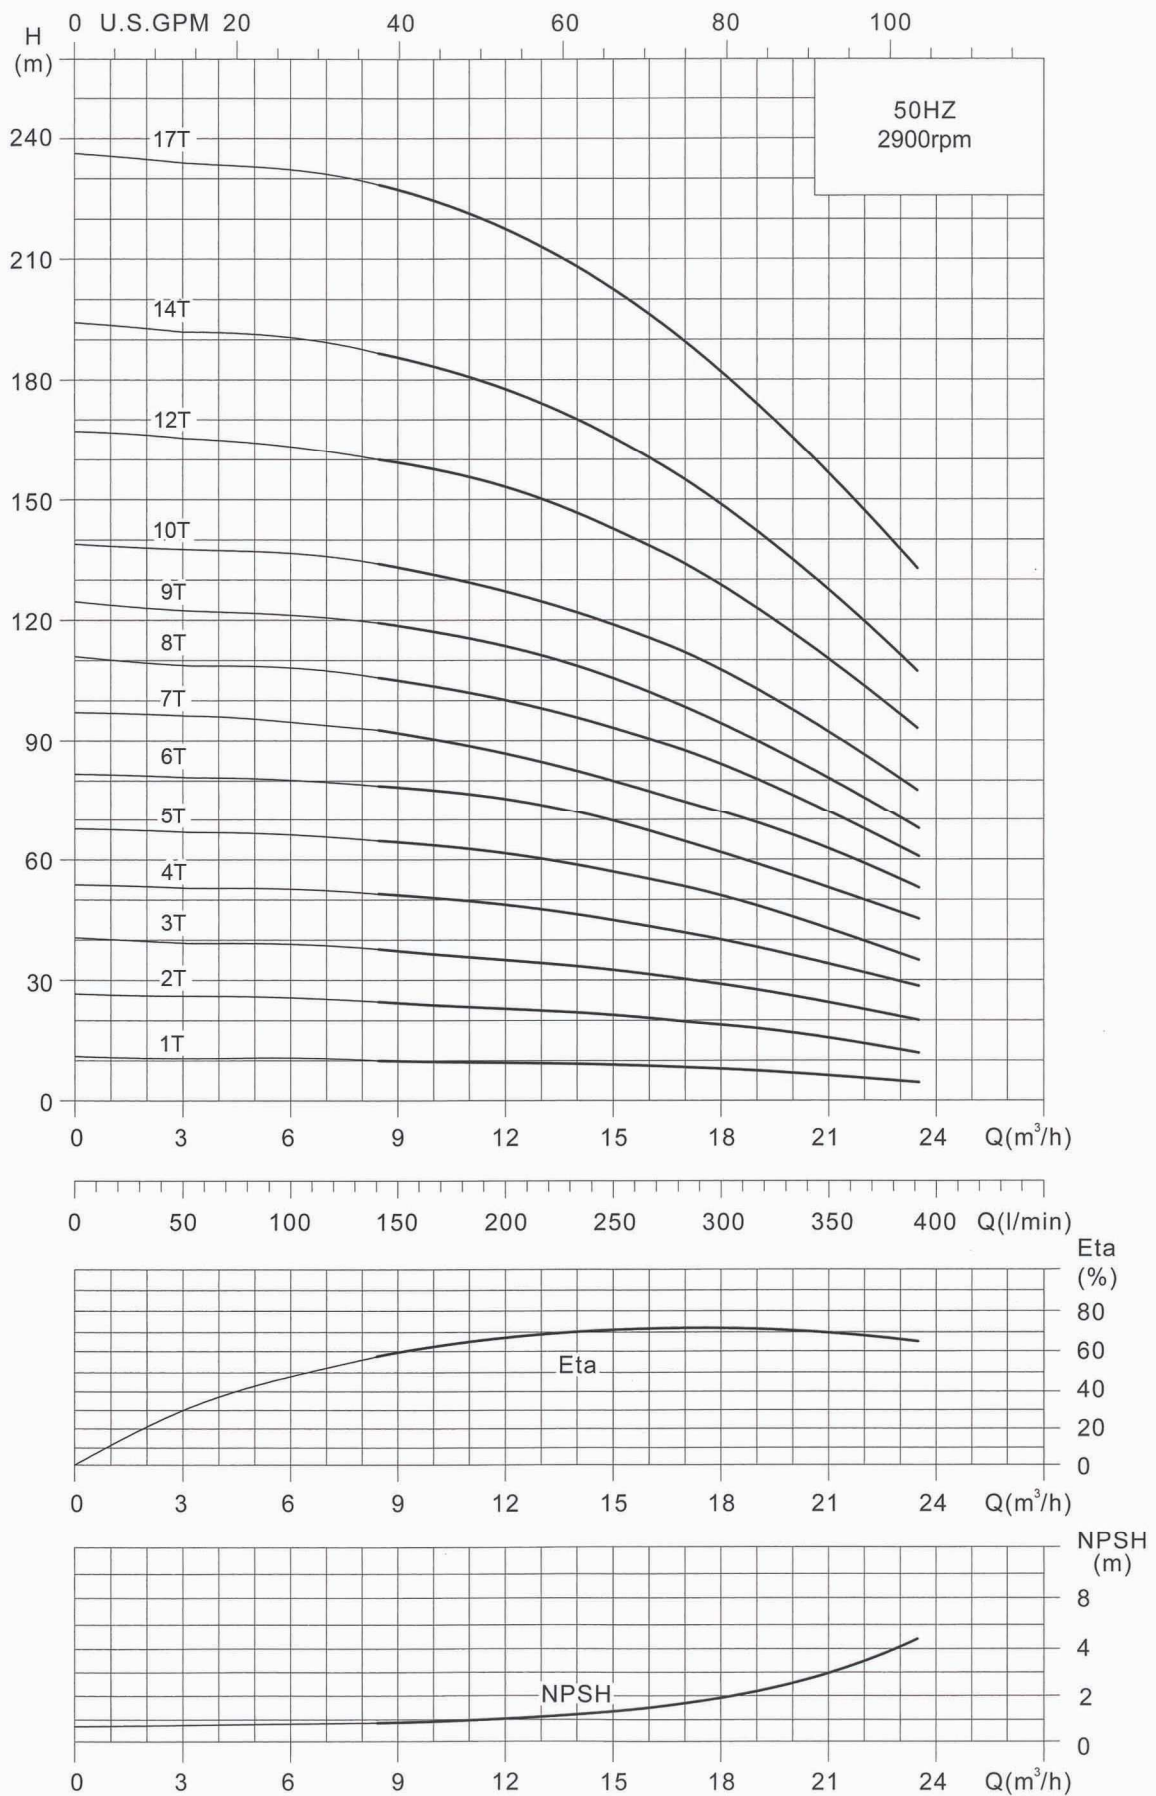

Dimensions and Weights - 2900rpm

APE, CVF 15

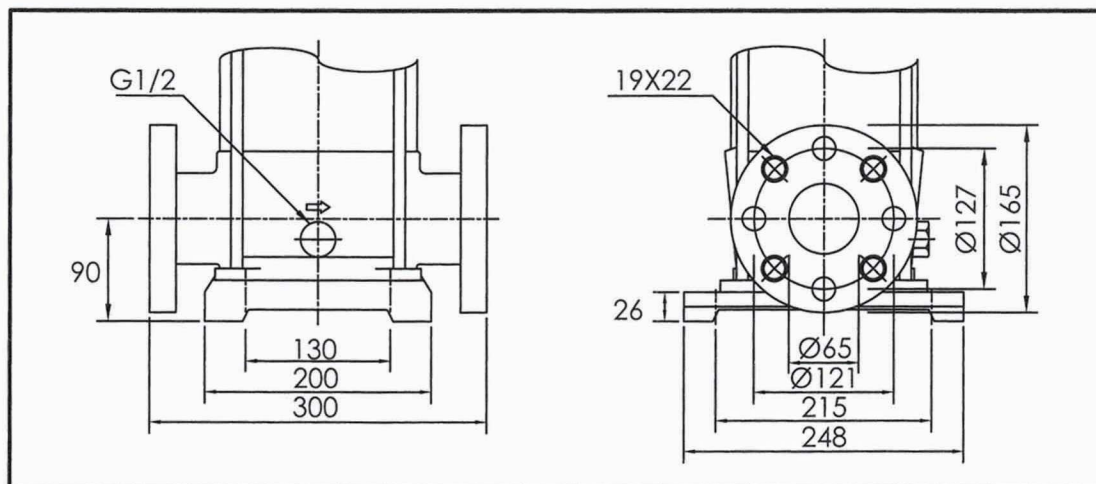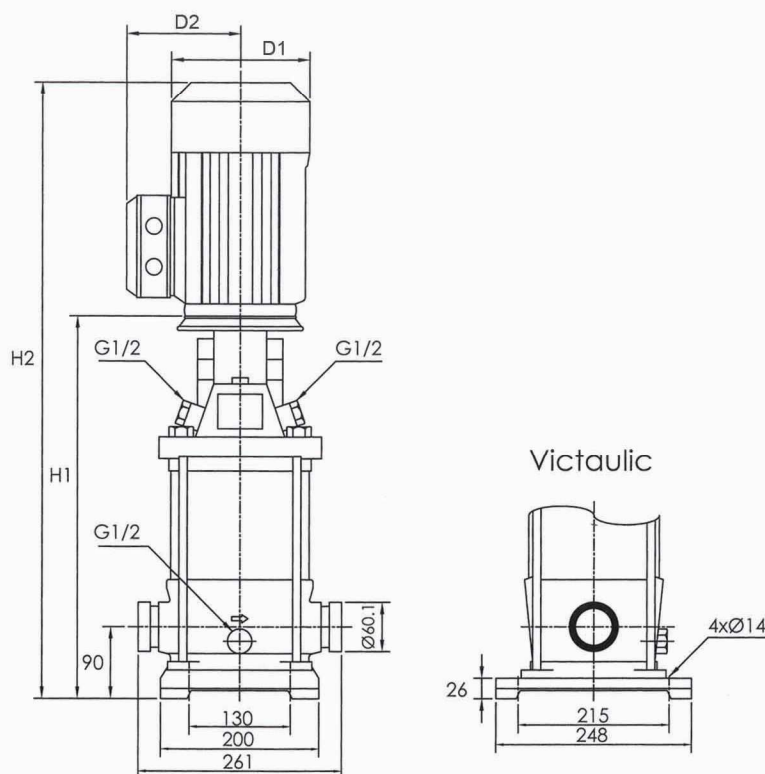

**Flange
(DIN-ANSI-JIS)
PN16-25/ DN50**

Pump Type (2900rpm)	Motor	Dimensions [mm]						Net Weight [kg]	
	P2	Victaulic		DIN Flange		D1	D2	Victaulic	DIN Flange
	[kW]	H1	H2	H1	H2				
APE / CVF 15-1T	1.1	387	618	397	628	141	109	34.0	42.0
APE / CVF 15-2T	2.2	403	675	413	685	175	144	44.3	48.8
APE / CVF 15-3T	3.0	453	777	463	787	198	153	52.5	57.0
APE / CVF 15-4T	4.0	498	828	508	838	221	174	60.9	65.4
APE / CVF 15-5T	4.0	543	873	553	883	221	174	62.3	66.8
APE / CVF 15-6T	5.5	620	1015	630	1025	275	195	87.1	91.6
APE / CVF 15-7T	5.5	665	1 060	675	1070	275	195	88.5	93.0
APE / CVF 15-8T	7.5	710	1145	720	1155	275	195	97.9	102.4
APE / CVF 15-9T	7.5	755	1190	765	1200	275	195	99.3	103.8
APE / CVF 15-10T	11.0	877	1375	887	1385	334	263	176.4	180.9
APE / CVF 15-12T	11.0	967	1465	977	1475	334	263	179.2	183.7
APE / CVF 15-14T	11.0	1057	1555	1067	1565	334	263	182.0	186.5
APE / CVF 15-17T	15.0	1192	1690	1202	1700	334	263	186.2	190.7