




Performance Curve - 2900rpm

APE, CVF 4

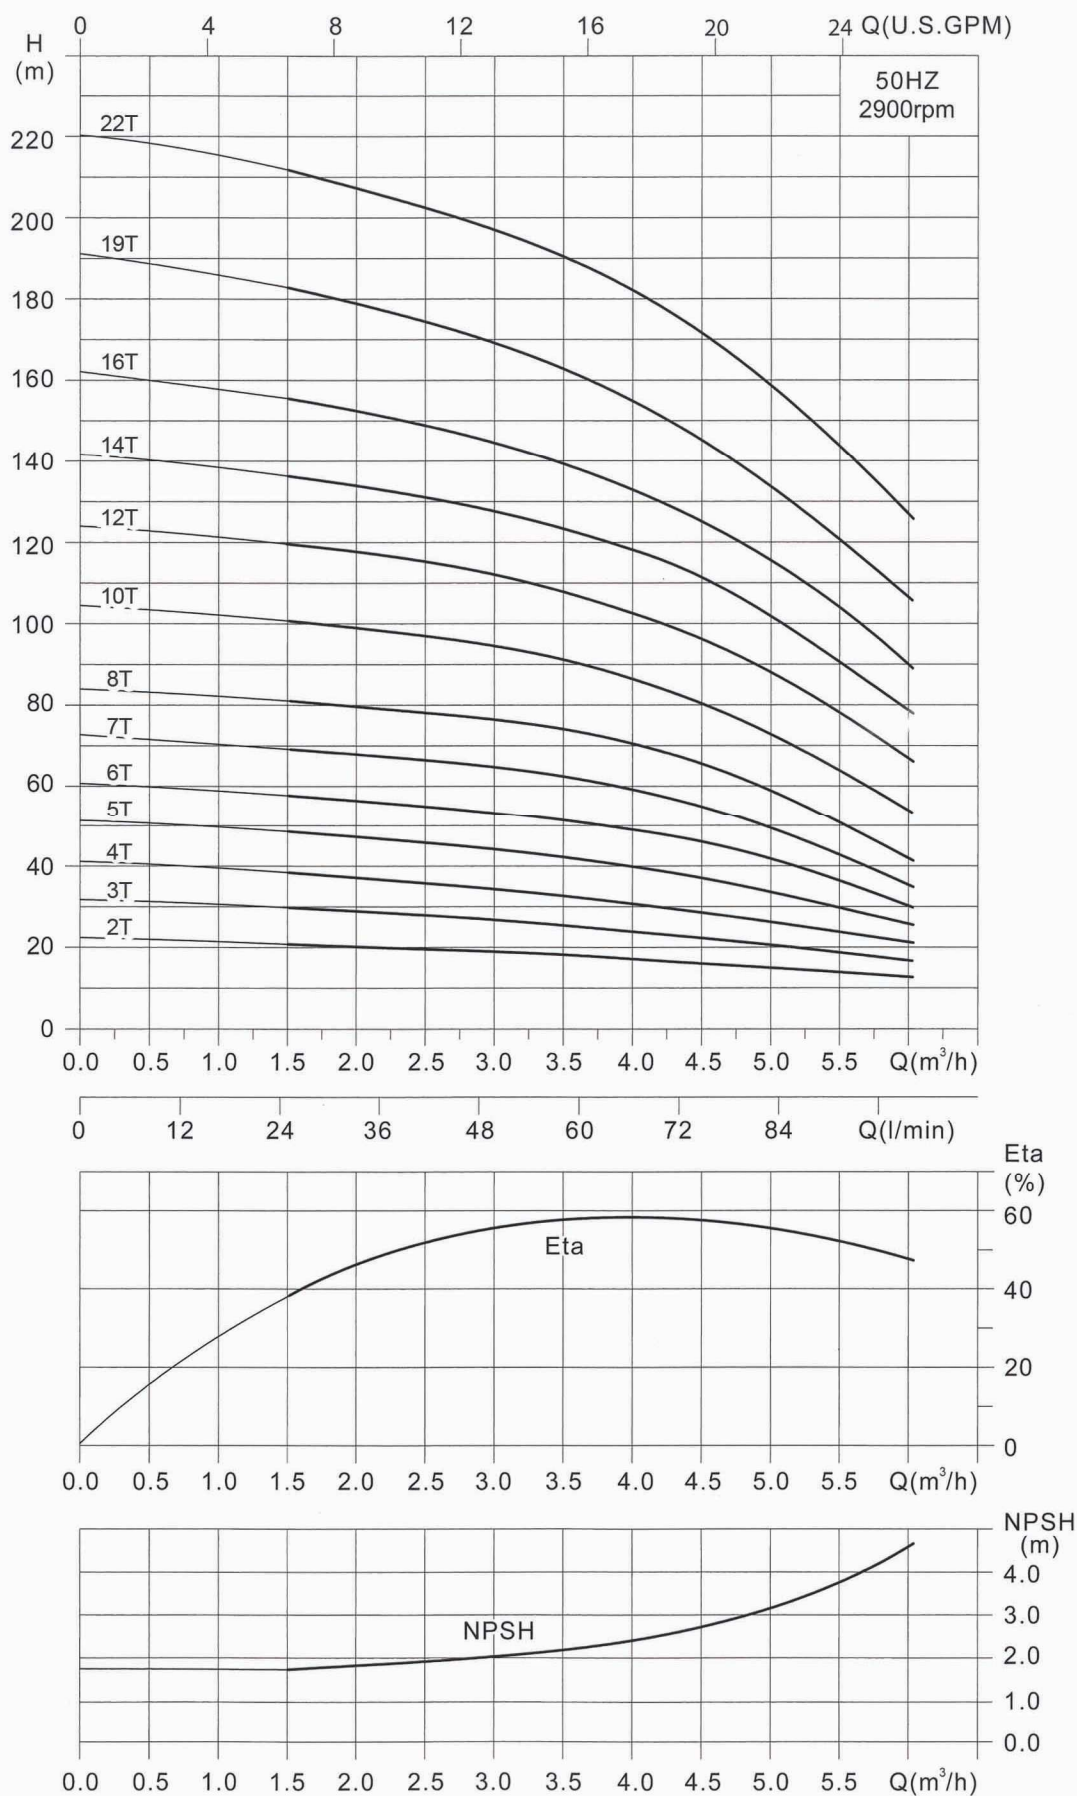

Dimensions and Weights - 2900rpm

APE, CVF 4

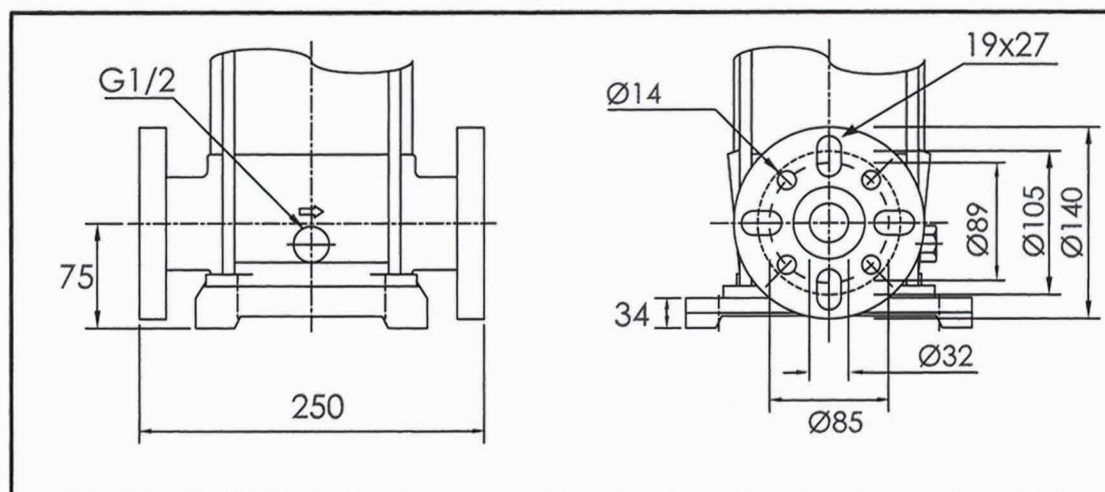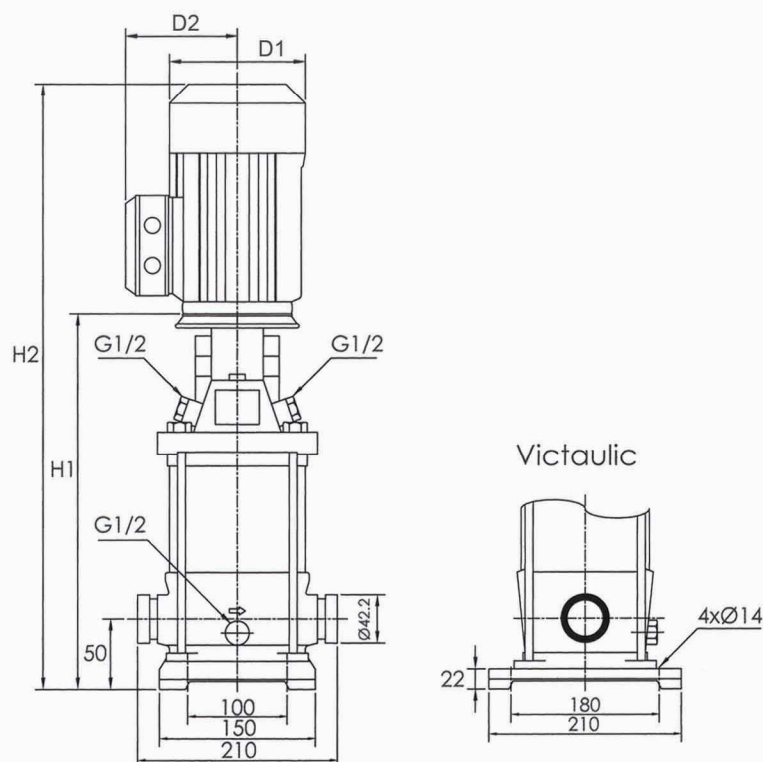

**Flange
(DIN-ANSI-JIS)
PN25/ DN25/32**

Pump Type (2900rpm)	Motor	Dimensions [mm]						Net Weight [kg]	
	P2	Victaulic		DIN Flange		D1	D2	Victaulic	DIN Flange
	[kW]	H1	H2	H1	H2				
APE / CVF 4-2T	0.37	234	439	259	464	141	109	19.0	23.0
APE / CVF 4-3T	0.55	252	457	277	482	141	109	20.0	24.0
APE / CVF 4-4T	0.75	270	475	295	500	141	109	23.0	27.0
APE / CVF 4-5T	1.1	294	535	319	560	141	109	26.0	30.0
APE / CVF 4-6T	1.1	312	553	337	578	141	109	26.0	30.0
APE / CVF 4-7T	1.5	330	623	355	648	175	144	34.0	38.0
APE / CVF 4-8T	1.5	348	641	373	666	175	144	35.0	39.0
APE / CVF 4-10T	2.2	392	685	417	710	175	144	37.0	41.0
APE / CVF 4-12T	2.2	428	721	453	746	175	144	38.0	42.0
APE / CVF 4-14T	3.0	464	757	489	782	198	153	45.0	49.0
APE / CVF 4-16T	3.0	500	793	525	818	198	153	48.0	52.0
APE / CVF 4-19T	4.0	574	879	599	904	221	174	57.0	61.0
APE / CVF 4-22T	4.0	628	933	653	958	221	174	58.0	62.0