




Performance Curve - 2900rpm

APE, CVF 5

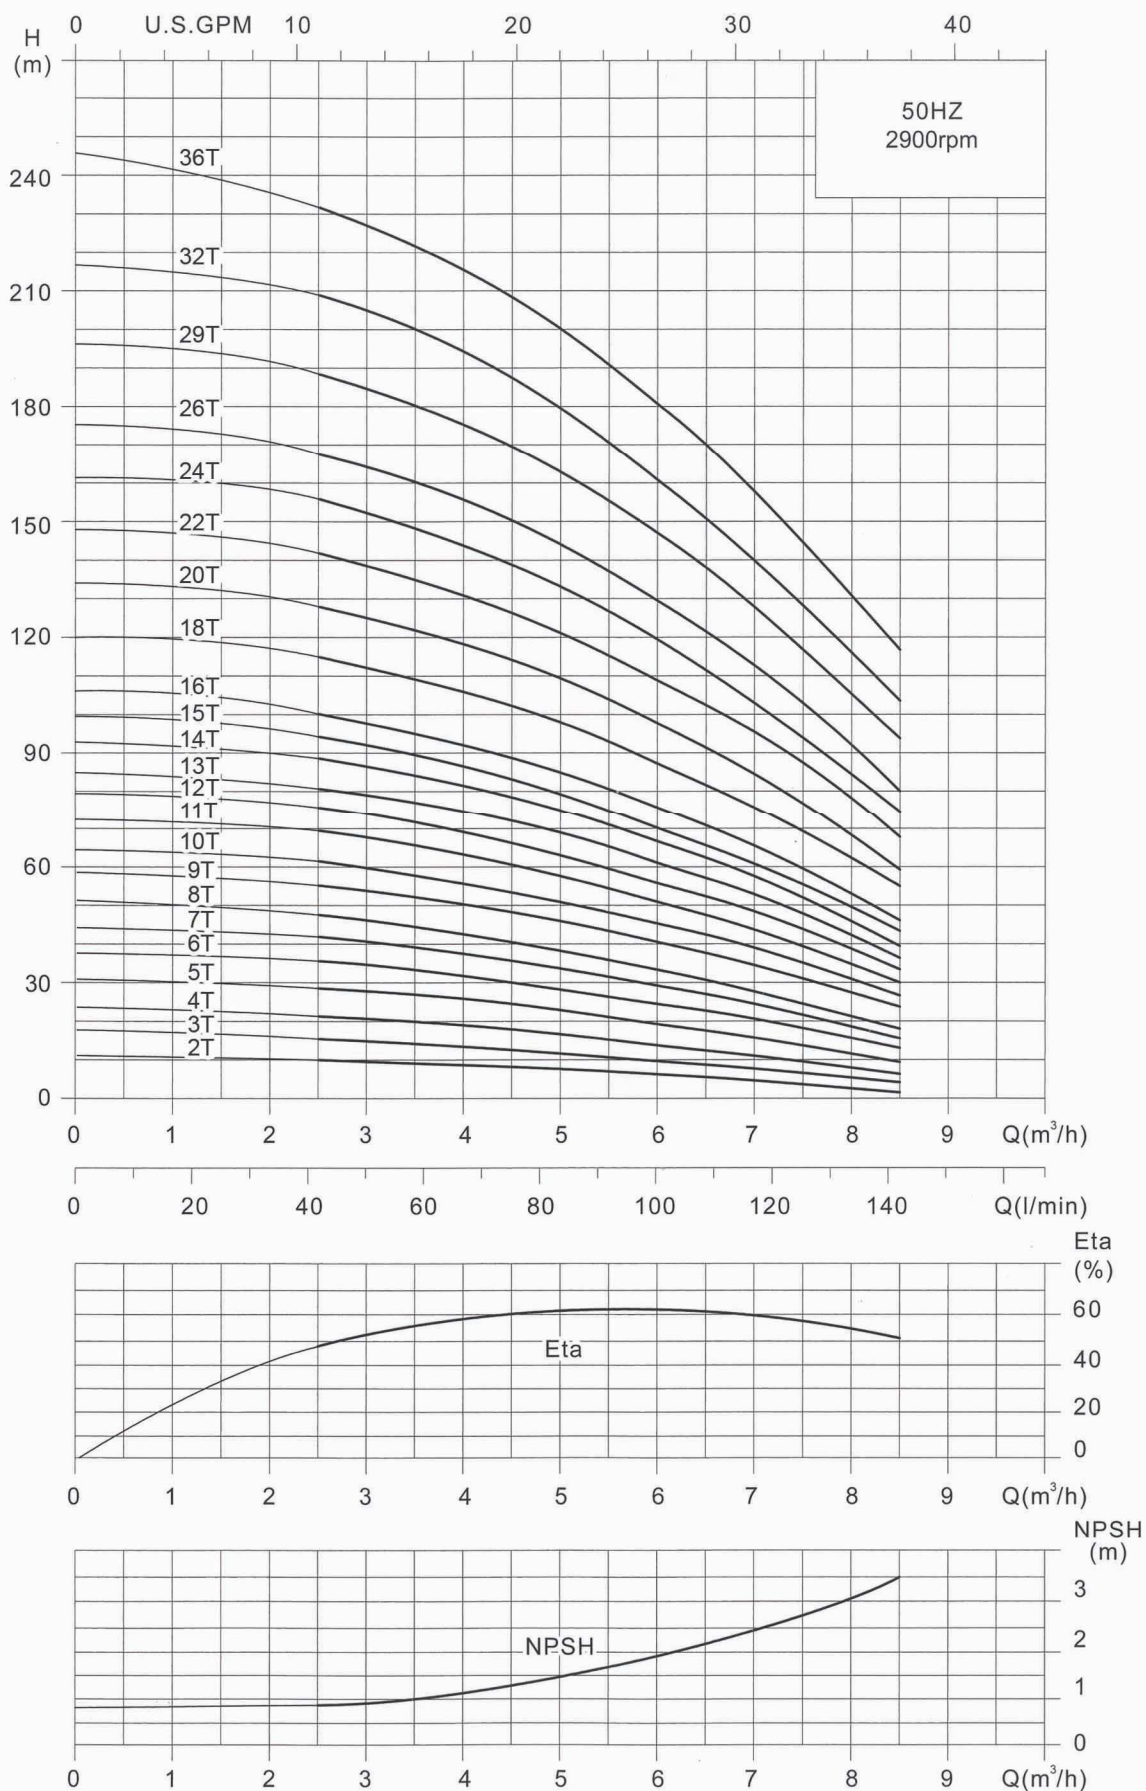

Dimensions and Weights - 2900rpm

APE, CVF 5

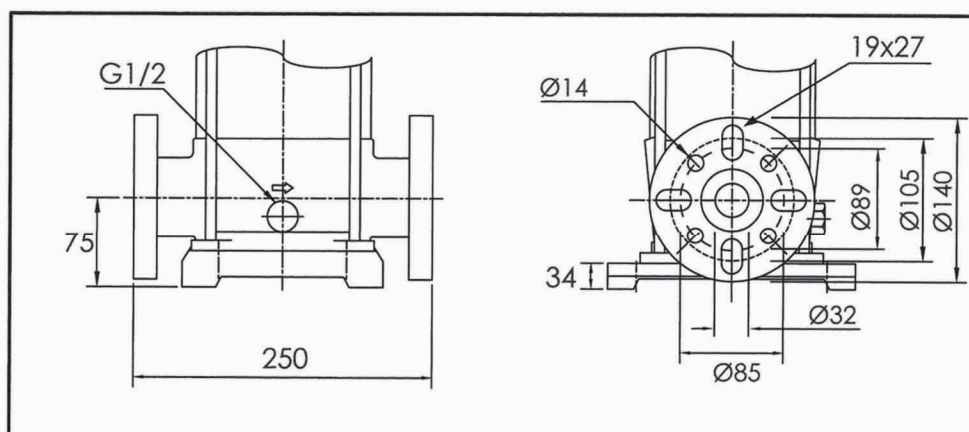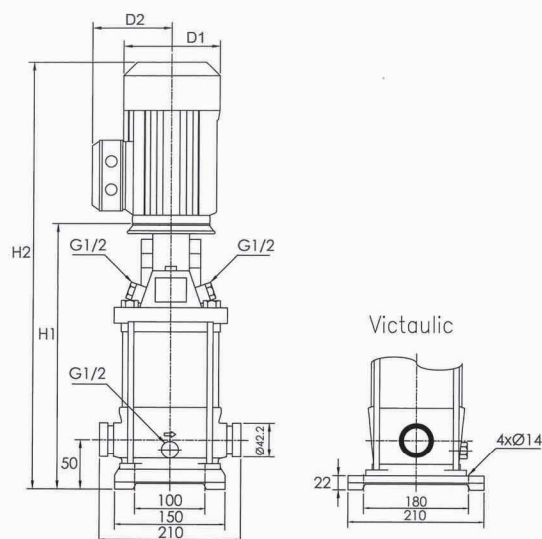

**Flange
(DIN-ANSI-JIS
PN25/ DN25/32)**

Pump Type (2900rpm)	Motor	Dimensions [mm]						Net Weight [kg]	
	P2	Victaulic		DIN Flange		D1	D2	Victaulic	DIN Flange
	[kW]	H1	H2	H1	H2				
APE / CVF 5-2T	0.37	257	448	282	473	141	109	16.0	21.0
APE / CVF 5-3T	0.55	284	475	309	500	141	109	18.0	22.0
APE / CVF 5-4T	0.55	311	502	336	527	141	109	18.0	22.0
APE / CVF 5-5T	0.75	344	575	369	600	141	109	21.0	25.0
APE / CVF 5-6T	1.1	371	602	396	627	141	109	24.0	28.0
APE / CVF 5-7T	1.1	398	629	423	654	141	109	24.0	28.0
APE / CVF 5-8T	1.1	425	656	450	681	141	109	25.0	29.0
APE / CVF 5-9T	1.5	468	714	493	739	175	144	32.5	36.5
APE / CVF 5-10T	1.5	495	741	520	766	175	144	33.5	37.1
APE / CVF 5-11T	2.2	522	794	547	819	175	144	36.1	39.6
APE / CVF 5-12T	2.2	549	821	574	873	175	144	36.7	40.2
APE / CVF 5-13T	2.2	576	848	601	873	175	144	37.2	40.8
APE / CVF 5-14T	2.2	603	875	628	900	175	144	37.8	41.3
APE / CVF 5-15T	2.2	630	902	655	927	175	144	38.4	41.9
APE / CVF 5-16T	2.2	657	929	682	954	175	144	39.0	42.5
APE / CVF 5-18T	3.0	715	1039	740	1064	198	153	47.5	51.1
APE / CVF 5-20T	3.0	769	1093	794	1118	198	153	48.7	52.2
APE / CVF 5-22T	4.0	823	1153	848	1178	221	174	56.8	60.4
APE / CVF 5-24T	4.0	877	1207	902	1232	221	174	58.0	61.5
APE / CVF 5-26T	4.0	931	1261	956	1286	221	174	59.1	62.6
APE / CVF 5-29T	4.0	1012	1342	1037	1364	221	174	60.8	64.4
APE / CVF 5-32T	5.5	1123	1518	1148	1543	275	195	79.7	83.2
APE / CVF 5-36T	5.5	1231	1626	1256	1651	275	195	82.0	85.5